


U.S. Map with Solar Regions

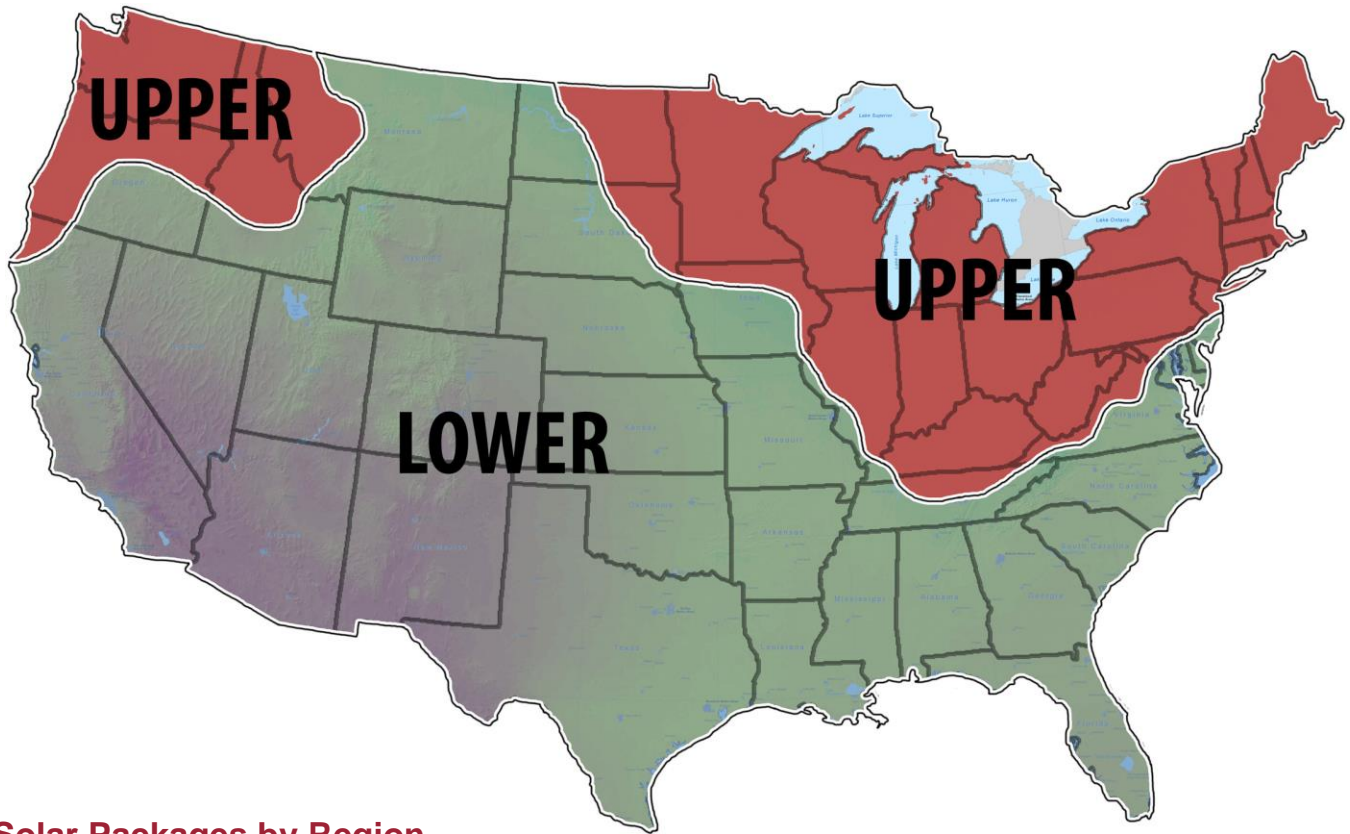

Solar Packages by Region

Region	Model	Provides Power For
Lower	SLR-100-84	ETP-520 Series Analog Call Station 4G Voice over LTE (VoLTE) Cellular Gateway (ETP-CGW-4G-GSM-V2) LED Blue Light Beacon (ETP-EL12/24) LED Panel Light (68590)
	SLR-200-168-ENC	VOIP-500 or VOIP-600 Series IP Call Station 4G LTE Router (IP-RTR-4G-US) LED Blue Light Beacon (ETP-EL12/24) LED Panel Light (68590)
Upper	SLR-140-84	ETP-520 Series Analog Call Station 4G Voice over LTE (VoLTE) Cellular Gateway (ETP-CGW-4G-GSM-V2) LED Blue Light Beacon (ETP-EL12/24) LED Panel Light (68590)
	SLR-280-168-ENC	VOIP-500 or VOIP-600 Series IP Call Station 4G LTE Router (IP-RTR-4G-US) LED Blue Light Beacon (ETP-EL12/24) LED Panel Light (68590)

Note: The -ENC option includes an external aluminum battery enclosure measuring 27.9 x 27.0 x 17.75 in.

BLUE LIGHT PHONE ACCESSORIES

Solar Systems for Analog and IP Call Stations

Tower Compatibility

Region	Solar Package Model	Tower Model Compatibility
Lower	SLR-100-84	ETP-MTE-WP
	SLR-200-168-ENC	ETP-MT/R-SOLAR60
Upper	SLR-140-84	ETP-MTE-WP
	SLR-280-168-ENC	ETP-MT/R-SOLAR60

Specifications

	SLR-100-84	SLR-140-84	SLR-200-168-ENC	SLR-280-168-ENC
Battery Bank				
Capacity (total)	84 Amp-hours	84 Amp-hours	168 Amp-hours	168 Amp-hours
Number of Batteries	2	2	4	4
Battery (Single)				
Length in (mm) each	7.7 (196)			
Width in (mm) each	5.2 (132)			
Height in (mm) each	8.1 (204)			
Weight lbs (kg) each	30 (13.6)			
Photovoltaic (PV) Array				
Number of PV Panels	1	1	2	2
Max. Power	100 Watts	140 Watts	200 Watts	280 Watts
Length in (mm)	21.1 (536)	26.5 (674)	42.2 (1072)	53.0 (1348)
Width in (mm)	47.4 (1204)	59.2 (1504)	47.4 (1204)	59.2 (1504)
Depth in (mm)	2.0 (50)	2.0 (50)	2.0 (50)	2.0 (50)
Weight lbs (kg)	17.0 (7.7)	26.5 (12)	34.0 (15.4)	53.0 (24.0)
Solar Charge Controller				
Output Voltage	12VDC	12VDC	12VDC	12VDC
Output Power	15.0A	15.0A	30.0A	30.0A
External Enclosure				
Length in (mm)	-	-	17.75 (451)	
Width in (mm)	-	-	27.9 (709)	
Depth in (mm)	-	-	27.0 (686)	
Weight lbs (kg)	-	-	39.0 (17.7)	
Mounting	-	-	Ground/Foundation Mount	